



## Simple but Powerful

An HD 720p Wi-Fi camera with a magnetic base, designed for simple and quick installation.

#### **Key Features**



720p



Supports MicroSD card slot, up to 256GB



Supports 2.4GHz Wi-Fi (IEEE802.11b, 802.11g, 802.11n)



True Day/Night camera with auto-switching. Infrared night vision up to 10 meters.



Two-way audio



#### Easy installation

The C2C comes with a magnetic base and mounting kitfor easy placement on walls or ceilings. Once set up, you can manually adjust it to cover just about any angle you need.

# HD 720p video with a wide-angle lens





The C2C delivers HD 720p video and extensive coverage with a 101° wide-angle lens, so you can keep an eye on what's valuable to you.

## Keep them safe, day and night


When it's dark, the C2C automatically switches to nightvision mode for around-the-clock HD video coverage, ensuring a night vision up to 10 meters.

#### Instant alerts (manual activation required)

The C2C watches for movement. It will take a picture and send alerts to your smartphone when it detects motions.

#### Two-way audio

The camera comes with a built-in microphone and speaker, enabling two-way audio via the camera and your phone or tablet.

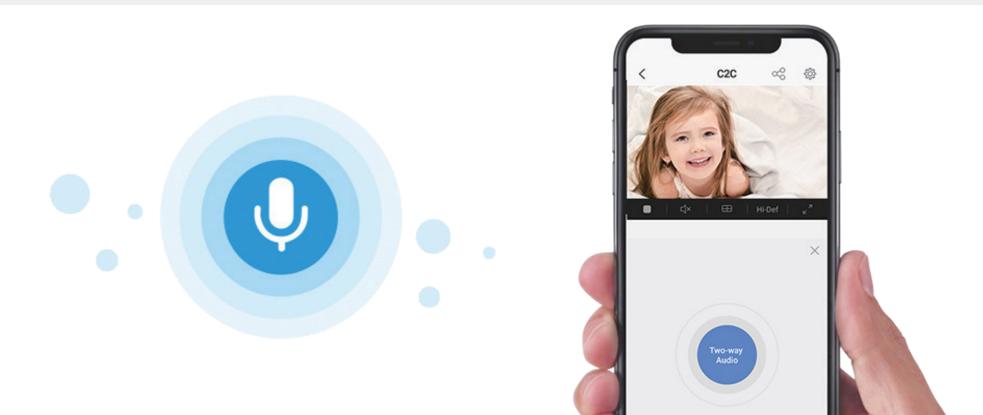





# Specifications Model CS-CV206-E0-1D1WF

#### Camera

Network Image Sensor 1/4" 1MP HD Progressive Scan CMOS Storage Shutter Speed Self-adaptive shutter Smart Alarm 2.8 mm @F2.5, View Angle: 86°, Diagonal Wi-Fi Pairing Lens View Angle: 101° Protocol Lens Mount M12 Interface Protocol Day & Night IR-cut filter with auto-switching **General Features** DNR 3D DNR Minimum Network **Digital WDR** WDR Requirements

#### Compression

/			Standard
	Video Compression	H.264	Frequency Range
	Н.264 Туре	Main Profile	Channel Bandwidth
	Video Bit Rate	HD; Standard. Adaptive bit rate.	Security
			Transmission Rate

#### Image

Max. Resolution	1280×720		Operating Conditions	-10°C ~ 50°C (14°F ~ 122°F), Humidity 95% or less (non-condensing)
				DC 5V±10%
Image Settings	Brightness, contrast, saturation, etc.	Brightness, contrast, saturation, etc. (configurable via EZVIZ Studio)	Power Consumption	MAX. 4.0 W
	(configurable via EZVIZ Studio)		IR Range	MAX. 10 meters
BLC	Support	Support	Product Dimensions	110 x 58 x 38 mm (4.33 x 2.28 x 1.50 inch)
	Support		Packaging Dimensions	149 x 91.5 x 87.5 mm (5.87 x 3.60 x 3.44 inch)
			Weight	100 g (3.53 oz)

Wi-Fi

General

Supports MicroSD card (max. 256GB)
Motion detection
SmartConfig (Wi-Fi One-Key Configuration)/AP paring
EZVIZ Cloud proprietary protocol
EZVIZ Cloud proprietary protocol
Anti-Flicker, Dual-Stream, Heartbeat Messages, Mirror Image, Password Protection, Watermark
1Mbps
IEEE802.11b, 802.11g, 802.11n
2.4 GHz ~ 2.4835 GHz
Supports 20MHz
64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
11b: 11Mbps, 11g: 54Mbps, 11n: 72Mbps
-10°C ~ 50°C (14°F ~ 122°F), Humidity 95%
or less (non-condensing) DC 5V±10%
MAX. 4.0 W

## Package Contents:

- C2C

- 3 Meters USB Cable
- Power Adapter
- Foam Sticker
- Metal Plate (3.5mm Hole Diameter)
- Quick Start Guide

Specifications are subject to change without notice. EZVIZ is a registered trademark of Hangzhou EZVIZ Network Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders.

https://www.ezvizlife.com/

## Certificates

FCC/UL/CE/RoHS/WEEE/REACH

