

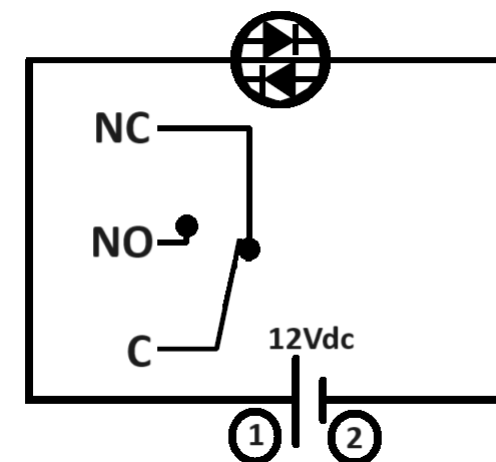








CHAVES ANTIVANDALISMO - PINAGEM

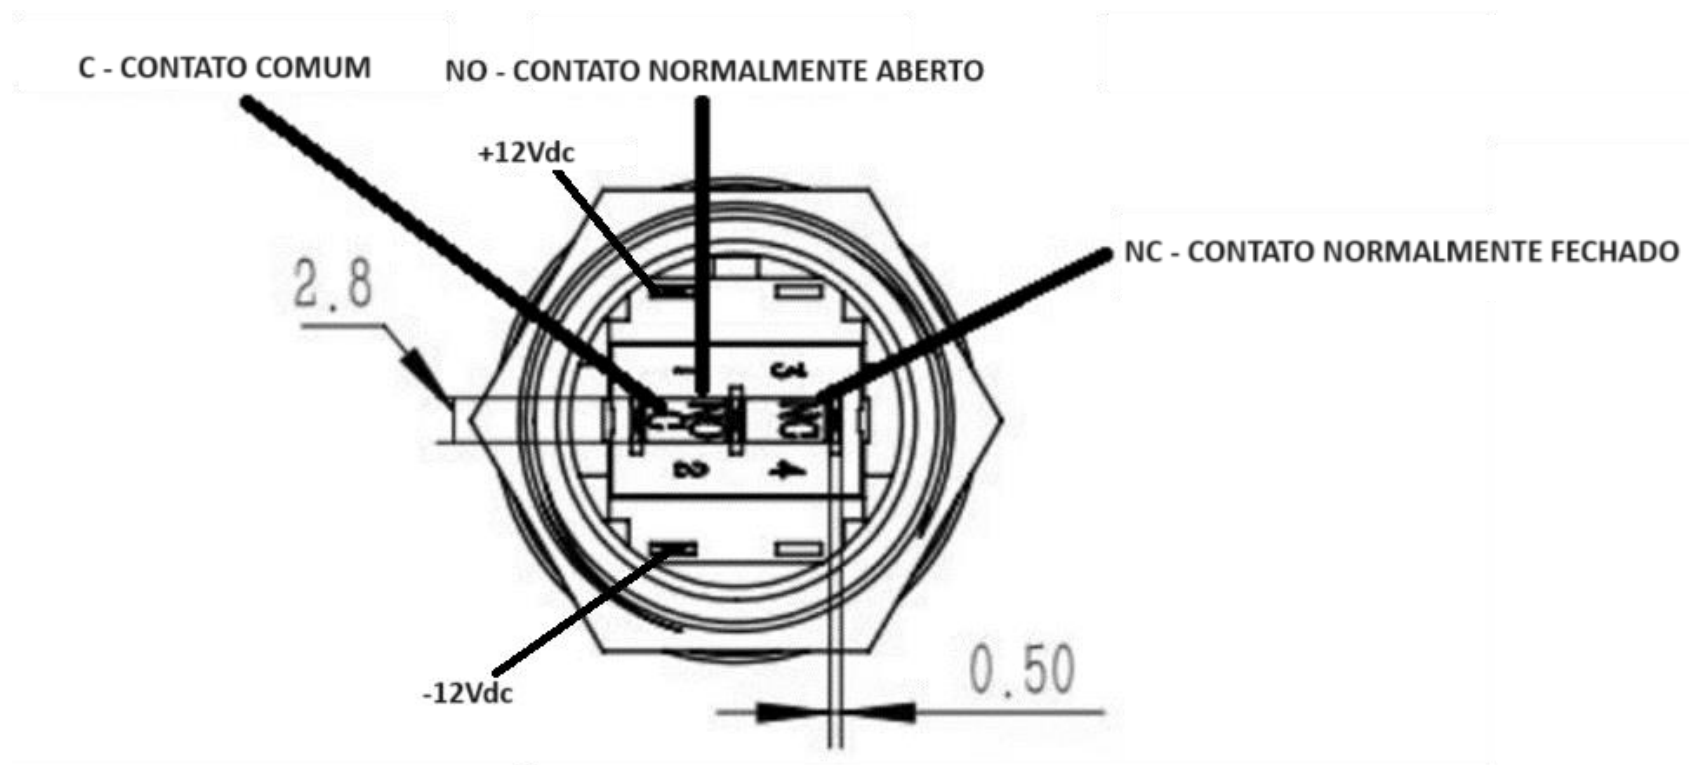

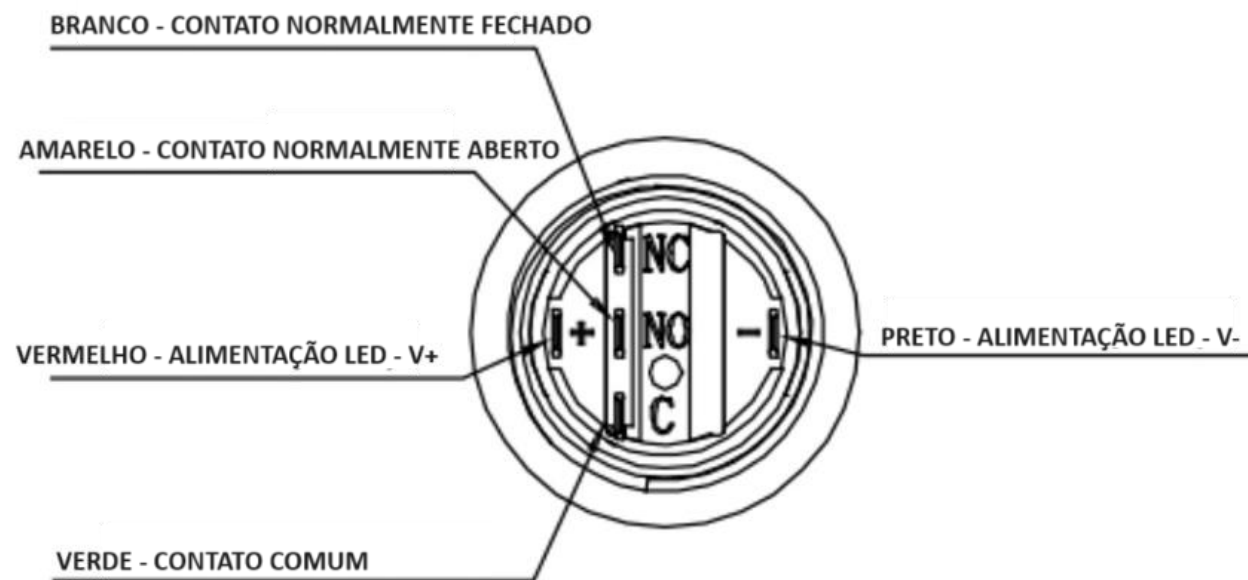

ESQUEMA DE LIGAÇÃO - CHTE0006

更改	说明	修改人	审核

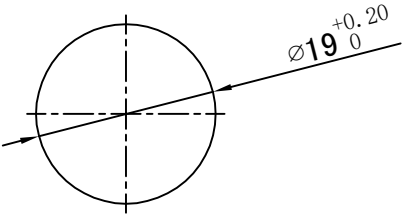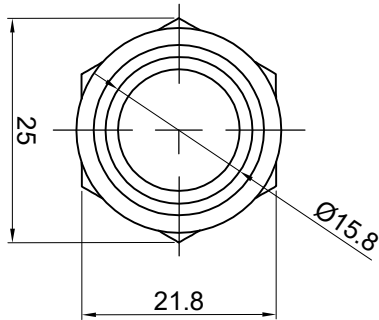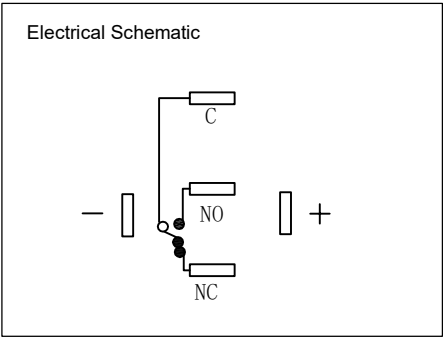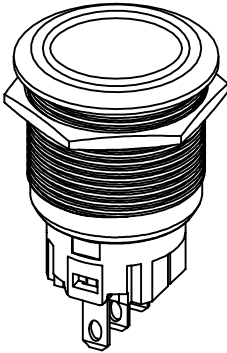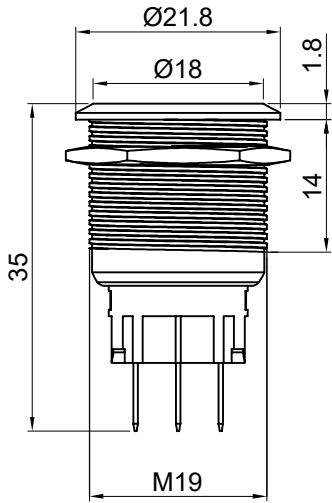

PANEL CUTOUT
MAX.PANEL THICKNESS
12mm

Specifications

Function: Momentary
Contact Arrangement: SPDT 1NO1NC
Mounting Type: Threaded Front Panel Mount
Torque For Threaded Body: 5-14Nm
LED Illumination: With LED,Any color is available.

Electrical

Contact Rating: 3A 250VAC

Materials

Bushing: Stainless Steel / Brass Nickel Plated / Aluminum Alloy
Base: PBT
Actuator: Stainless Steel / Brass Nickel Plated / Aluminum Alloy
Internal Assembly: POM
Spring: Steel
Sealing/O-Ring: Silicone
Terminals: Brass with Nickel Plated
Contact: Copper Nickel Plated

Operating Environment

Operating Temperature: -25℃ to +55℃
Sealing/Protection: IP20

NOTE:Specifications and materials listed above are for switches with standard options.For information on specific and custom switches,please contact Customer Service.

DR. 制图		APPD 审核	
DE. 设计		CHKD 校对	
DIMENSIONS	Tolerance	SCALE 比例 1.5/1	UNIT 单位 mm
0.00 ~ 10.00mm	±0.15mm	TITLE 名称 PUSH BUTTON SWITCH	
10.01 ~ 30.00mm	±0.20mm		
30.01 ~ 80.00mm	±0.25mm	DWG NO. 图号 /	
80.01 ~ 150.00mm	±0.30mm	FILE NAME 档案名称	
150.01mm↑	±0.40mm		
		SHEET 张	1 / 1
		REV. 更改	1