



# 32 Channel

## Network Video Recorder

MODEL: VIGI NVR4032H



# H.265+

VIGI NVR4032H



4 HDD (Up to 1 **6 TB**  
Each) <sup>†</sup> Store and Recall  
Everything



Smart Detection



Two-Way Audio



Onvif



Face Recognition\*



Smart Search by  
Motion and Object\*

## Overview

### VIGI Surveillance Solution

The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever. Our outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

## Highlight



#### 32-Channel Live View

Ensure a real-time display of every monitored area on one screen and take everything under your control.



#### 4K Video Output

Show more details with up to 8MP resolution for one channel and 16-ch@2MP/ 8-ch@4MP decoding capacity in total for all channels



#### Mass Storage

4 SATA interfaces (up to 16 TB capability per HDD) ensure to store and secure your data for quick, convenient access.



#### Easy Management

Seamlessly manage the NVR and connected cameras via the web UI, NVR UI, VIGI app, and VIGI Security Manager. Customize the management systems to suit your specific needs.



#### Face Recognition\*


From attendance to security, the VIGI NVR with built-in Intelligent face recognition allows you to recognize and classify visitors, staff and strangers, and maximize security.



#### Smart Search by Motion and Object\*

Efficiently search out and review certain video clips by motion type, characteristics of person/vehicle, tag, and more.

# Network Topology

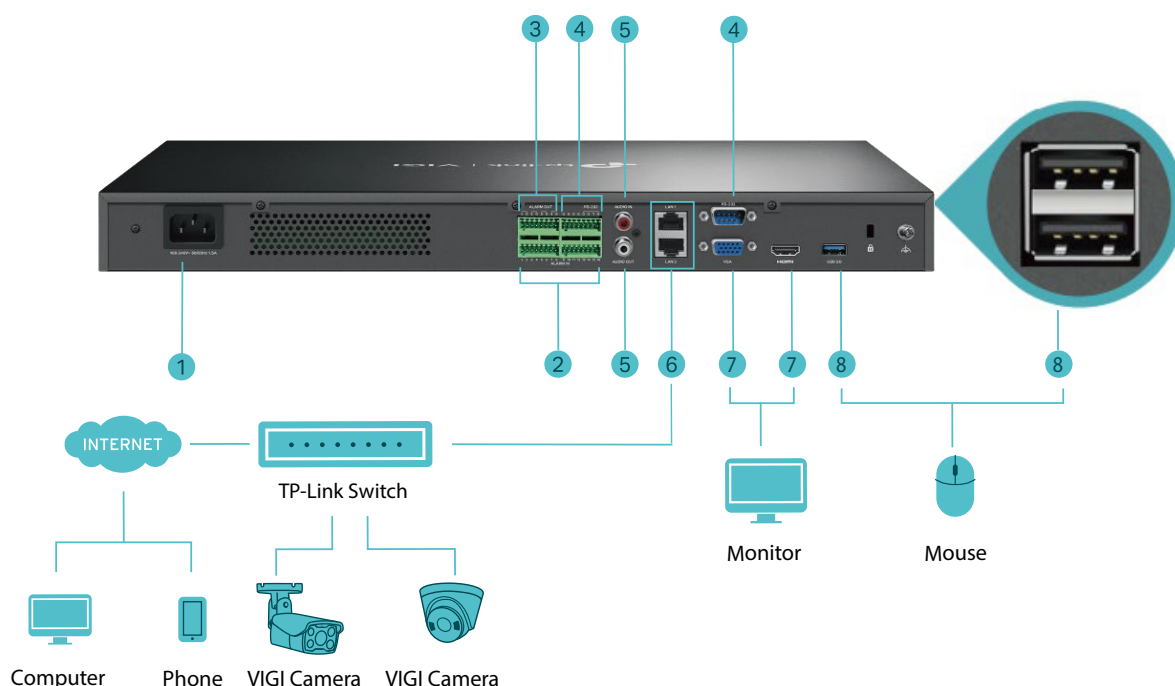

1. Power Supply
2. 16 × ALARM IN for Alarm Detectors Connection, Such as Smoke Detector
3. 4 × ALARM OUT for External Alarm Devices Connection, Such as Warning Light, and Alarm Bell
4. Two Forms of RS-232 Ports to Debug and Pass Through Serial Data
5. AUDIO IN and AUDIO OUT for Two-Way Audio
6. 2 × LAN Ports for Ethernet Connection
7. HDMI and VGA Ports for Independent Video Output
8. 1 × USB 3.0 (Rear) Port and 2 × USB 2.0 (Front) Ports for Mouse, Keyboard, or Mobile Hard Disk Connection <sup>†</sup>

\*These features are in development and will update with future software iterations.

<sup>†</sup>A hard disk drive (not included) must be installed for operation.


©202 4 TP-Link

# Specifications

Model	VIGI NVR4032H	
Video and Audio	IP Video Input	32-Channel
	Incoming Bandwidth	320 Mbps
	Outgoing Bandwidth	320 Mbps
	Recording Resolution	8MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	HDMI Output Resolution	1 Channel, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
	VGA Output Resolution	1 Channel, Resolution: 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
	Video Output Mode	HDMI/VGA Independent Output
	Multi-View Display	1/4/6/8/9/16/25/32/36
Decoding	Audio Compression	G.711A/G.711U/G.726
	Video Compression	H.265+/H.265/ H.264+/H.264
	Record Resolution	8MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	Synchronous Playback	16-Channel <sup>†</sup>
	Capability	4-ch@8MP (25fps), 6-ch@5MP (25fps), 8-ch@4MP (25fps), 10-ch@3MP (25fps), 16-ch@1080P (25fps)
Network	Protocols	UPnP (Plug and Play), NTP (Network Timing), TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, RTSP, SSL/TLS, RTP, IPv4, ARP
	Interoperability	ONVIF Profile S, CGI
	Mobile Phone Access	Android, iOS
	Web Browser	Chrome (57+), Firefox (52+), Edge (91+)
Hard Disk	SATA	4 SATA Interfaces
	Capacity	Up to 16 TB Capacity for Each HDD*
RAID*	RAID 1, RAID5	

\*RAID here is implemented in software.

Record Management	Record Mode	Manual Recording, Scheduling Recording, Motion Detection Recording
	Playback Mode	Instant Playback, Regular Playback, Tag Playback, Event Playback
	Backup Mode	Regular Backup, Video Clip Backup, File Export (.mp4 supported)
	Playback Function	Play, Pause, Stop, Fast Forward, Fast Backward, Play by Frame, Full Screen, Video Clip, Export Clip, Digital Zoom, Lock Recording, Audio On/Off
Alarm	General Alarm	Motion Detection, Video Tampering, Intrusion Detection, Line-Crossing Detection, Region Entering Detection, Region Exiting Detection, Object Abandoned/Removal Detection, Vehicle Detection, Human Detection Note: The alarm function requires the use of a camera.
	Anomaly Alarm	Video Loss, Offline and IP Conflict, Disk Exception, Login Exception, Fan Exception, FTP Snapshot. Note: The alarm function requires the use of a camera.
	Alarm Linkage	Recording, White Light Alarm, Buzzer, Log, Audible Alarm Note: The alarm function requires the use of a camera.
External Interface	Network Interface	2, RJ-45 10/100/1000 Mbps Self-Adaptive Ethernet Interface
	USB Interface	2 Front USB 2.0 Ports, 1 Rear USB 3.0 Port
	Audio Interface	1-ch RCA Input; 1-ch RCA Output
	Alarm In/Out	16/4
	Serial Interface	1, RS232
	Power	1× AC Jack
	Reset Button	1
	Speaker	N/A
	eSATA	N/A
	HDMI	1
	VGA	1

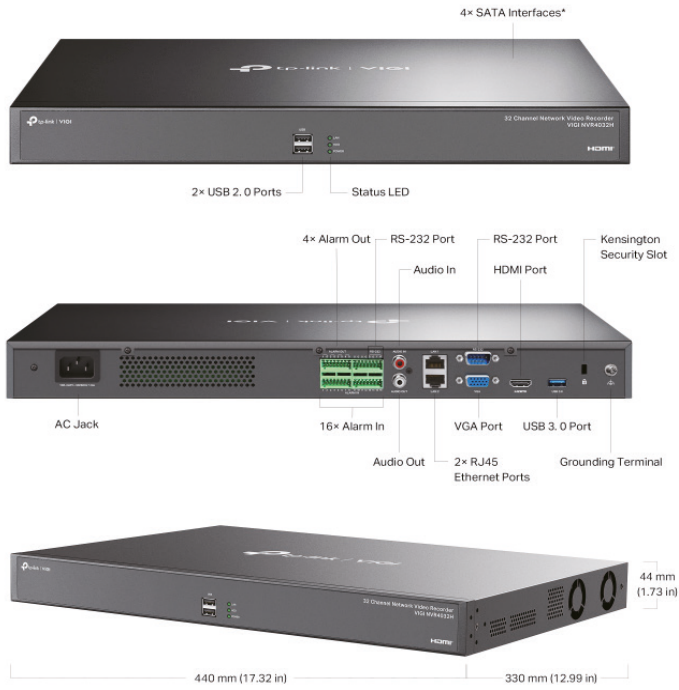General	Storage Temperature	-40~70 °C
	Storage Humidity	10%~90% RH Non-Condensing
	Package Contents	VIG I Network Video Recorder, Mouse, Installation Guide, Power Cord, HDD Power Cables, HDD Data Cables, Terminal Blocks, Mounting Brackets, Screws, Rubber Feet
	External Power Supply	100-240 VAC, 50 to 60HZ, 1.5A
	Max Power Consumption (Without Disk)	5 W
	Max Power Consumption (With Disk)	48 W
	Working Temperature	-10~55 °C
	Working Humidity	10%~90% RH Non-Condensing
	Dimensions (W X D X H)	440 × 330 × 44 mm
	Net Weight	4.0 Kg <sup>§</sup>
	Gross Weight	5.2 K g <sup>§</sup>
	Power Supply	100-240 VAC , 50 to 60HZ, 1.5A
	Power Consumption	<ul style="list-style-type: none"> <li>• 5 W (Without Disk)</li> <li>• 48 W (With Disk)</li> </ul>
	Certifications	CE, EAC, UKCA, RCM, Triman, RoHS, VCCI, FCC, IC, HDMI
Build Features	 <p>The diagram illustrates the VIG I Network Video Recorder from three perspectives: front, rear, and side. The front view shows the top panel with 4x SATA interfaces, 2x USB 2.0 Ports, and a Status LED. The rear view shows the back panel with 4x Alarm Out, RS-232 Port, RS-232 Port, Kensington Security Slot, Audio In, HDMI Port, AC Jack, 16x Alarm In, VGA Port, USB 3.0 Port, Audio Out, 2x RJ45 Ethernet Ports, and a Grounding Terminal. The side view shows the dimensions: 440 mm (17.32 in) width, 330 mm (12.99 in) depth, and 44 mm (1.73 in) height. A note at the bottom states: *HDD is not included.</p>	

†The number of simultaneously playable channels may be fewer than 16, or none, if the total resolution exceeds 32MP.

\*HDD is not included.

‡This model currently supports ONVIF Profile S.

§Due to the weight of this model, it is recommended to use a tray when mounting the rack with angle iron. Please note that the tray is not included.